


TECHNICAL DATA SHEET
for
Single Mode Optical Fiber Cable
Type: Multitube Steel Tape Armored Cable

A. Features:

- 1) The unique extruding technology provides the fibers in the tube with good flexible and bending endurance.
- 2) The unique fiber excess length control method provides the cable with excellent mechanical and environmental properties.
- 3) Multiple water-blocking materials filling provides dual water-blocking function.
- 4) Steel/PE corrugated tape adhesion sheath provides good crush resistance.
- 5) Small outer diameter, lightness, compact construction and good flexibility.

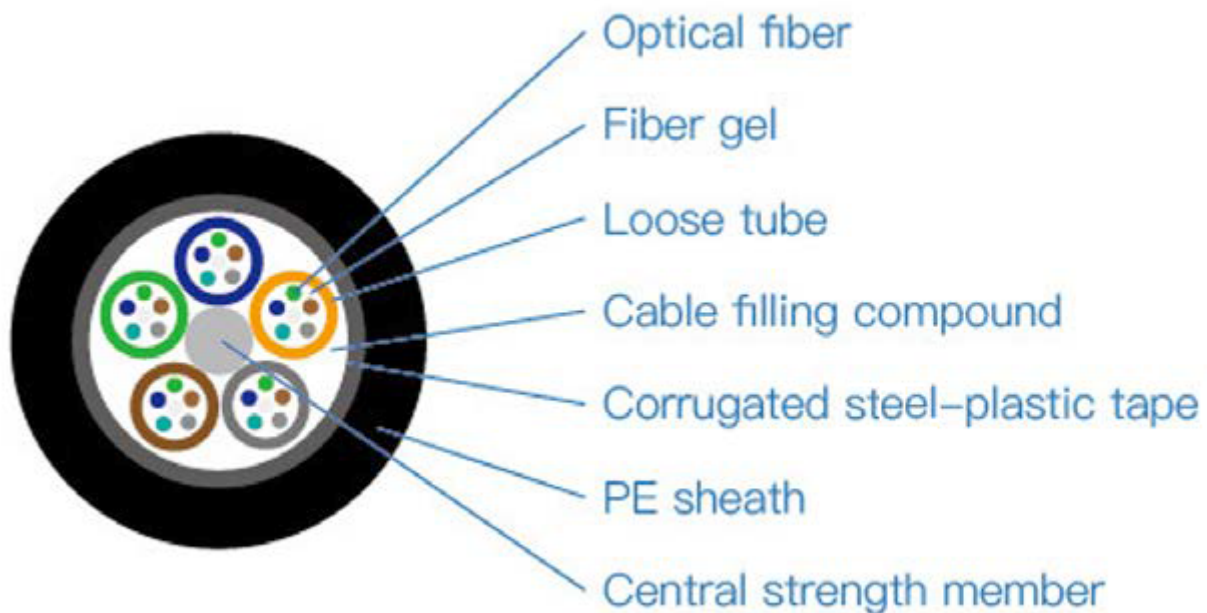

B. Installation:

Duct, Aerial

E. Technical parameter:

Fiber count (Core)		24
Outer diameter ($\pm 0.5\text{mm}$)		9.5
Loose Tube		1.9mm
Strength Member		Steel wire 1.5mm
Weight (Kg/Km)		80
Minimum tensile strength (N)	Short-term	1500
	Long-term	600
Crushing (Min) (N/100mm)	Short-term	1000
	Long-term	300
Temperature range		-40°C to +60°C

Fiber Color Identification

Unit S.N.	1	2	3	4	5
Fiber S.N.	Blue Tube	Orange Tube	Green Tube	Brown Tube	Natural Filler
1	Blue	Blue	Blue	Blue	N/A
2	Orange	Orange	Orange	Orange	N/A
3	Green	Green	Green	Green	N/A
4	Brown	Brown	Brown	Brown	N/A
5	Slate	Slate	Slate	Slate	N/A
6	White	White	White	White	N/A

The properties of single mode optical fiber (ITU-T Rec. G.652D)

Parameter	Specification
Fiber type	Single mode G.652D
Fiber material	Doped silica
Attenuation coefficient @ 1310 nm @ 1383 nm @ 1550 nm @ 1625 nm	≤ 0.36 dB/km ≤ 0.36 dB/km ≤ 0.22 dB/km ≤ 0.30 dB/km
Point discontinuity	≤ 0.05 dB
Cable cut-off wavelength	≤ 1260 nm
Zero-dispersion wavelength	1300 ~ 1324 nm
Zero-dispersion slope	≤ 0.093 ps/(nm ² .km)
Chromatic dispersion @ 1288 ~ 1339 nm @ 1271 ~ 1360 nm @ 1550 nm @ 1625 nm	≤ 3.5 ps/(nm. km) ≤ 5.3 ps/(nm. km) ≤ 18 ps/(nm. km) ≤ 22 ps/(nm. km)
PMD _Q (Quadrature average*)	≤ 0.2 ps/km ^{1/2}
Mode field diameter @ 1310 nm	9.2±0.4 μm
Core/Clad concentricity error	≤ 0.5 μm
Cladding diameter	125.0 ± 0.7 μm
Cladding non-circularity	$\leq 1.0\%$
Primary coating diameter	245 ± 10 μm
Proof test level	100 kpsi (=0.69 Gpa), 1%
Temperature dependence 0°C~ +70°C @ 1310 & 1550nm	≤ 0.1 dB/km

* PMD_Q is a link of 20 cable sections (M) and a probability level of 0.01% (Q).

Characteristic of Optical Cable

Mechanical & environmental characteristics

Cable bending radius	10 x cable diameter (during operation)
	20 x cable diameter (during installation)

Temperature range

Operating temperature range	-40°C to +60°C
Storage / Transport temperature range	-50°C to +70°C
Installation temperature range	-20°C to +50°C

Main mechanical & environmental characteristics test

NO	ITEM	TEST METHOD	ACCEPTANCE REQUIREMENTS
1	Tensile Strength IEC 794-1-E1	- Load: 6, 000 N - Length of cable under load: 50m	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
2	Crush Test IEC 60794-1-E3	- Load: 1, 000 N/100mm - Load time: ≥ 1 min	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
3	Impact Test IEC 60794-1-E4	- Points of impact: 5 - Times of per point: 5 - Impact energy: 4.5Nm - Radius of hammer head: 12.5mm - Impact rate: 2sec/cycle	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
4	Repeated Bending IEC 60794-1-E6	- Bending Dia.: 20 x OD - Load: 150N - Flexing rate: 3sec/cycle - No. of cycle: 30	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
5	Torsion IEC 60794-1-E7	- Length: 1m - Load: 150N - Twist rate: 1min/cycle - Twist angle: $\pm 180^\circ$ - No. of cycle: 10	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
6	Water Penetration IEC 60794-1-F5B	- Height of water: 1m - Sample length: 3 m - Time: 24 hour	- No water shall have leaked from the opposite end of cable
7	Temperature Cycling IEC 60794-1-F1	- Temperature step: +20°C $\rightarrow$ -40°C $\rightarrow$ +60°C $\rightarrow$ +20°C - Time per each step: 24 hrs - Number of cycle: 2	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
8	Compound Flow IEC 60794-1-E14	- Sample length: 30 cm - Temp: 70°C $\pm$ 2°C - Time: 24 hours	- No compound flow
9	Sheath High Voltage Test	- On line test - 9t KV (t-sheath thickness)	- No sheath breakdown